

ESA Requirements on EOL De-orbit

Technical Day on De-orbit Strategies
ESTEC, Noordwijk, 17th March 2015

Prepared by:
Independent Safety Office (TEC-QI)

ESA Space Debris Mitigation Policy and Requirements



ESA/ADMIN/IPOL(2014)2

Space Debris Mitigation Policy for Agency Projects

28/03/2014

ECSS-U-AS-10C

Adoption Notice of ISO 24113: Space Debris Mitigation Requirements

10/02/2012

ISO 24113

Space Debris Mitigation Requirements

15/05/2011

ESA
Director General's Office

ESA/ADMIN/IPOL/2014)2
Att.: Annexes 2
Paris, 28 March 2014
(Original: English)

Distribution: all staff
ESA unclassified – "Releasable to the Public"

Space Debris Mitigation Policy for Agency Projects

1. INTRODUCTION

As a consequence of spaceflight activities, the number of functional and non-functional (i.e.: space debris) human-made objects in Earth orbit continues to grow. To minimise the impact of space operations on the orbital environment, to reduce the risk of collision on orbit and to ensure the safety of the public on ground during re-entry, mitigation and safety measures must be anticipated as from the conception of a space system.

In May 2011, the 2nd edition of ISO 24113 "Space Systems – Space Debris Mitigation Requirements" was issued as the international standard which establishes the design and operations requirements to minimise the impact of space operations on the orbital environment. On 10th February, 2012, this standard was adopted by the European Cooperation on Space Standardisation (ECSS) as the ECSS-U-AS-10C standard (Adoption Notice of ISO 24113: Space Systems – Space debris mitigation requirements).

The present Instruction establishes the ESA standard for the technical requirements on space debris mitigation for Agency projects, it sets out the principles governing its implementation and the definition of responsibilities.

2. POLICY

In order to ensure a corporate approach on space debris mitigation, it is the Agency's policy that the ECSS-U-AS-10C is established as the ESA standard ("the standard") for the technical requirements on space debris mitigation for Agency projects.

As the standard foresees that in cases of re-entry the maximum acceptable casualty risk shall be determined by the approving agents, it is the Agency's policy to define that the maximum acceptable casualty risk for ESA space systems shall be as follows:

- For ESA Space Systems for which the System Requirements Review has already been kicked off at the time of entry into force of this Instruction, casualty risk minimisation shall be implemented on a best effort basis and documented in the Space Debris Mitigation Report.
- For ESA Space Systems for which the System Requirements Review has not yet been kicked off at the time of entry into force of this Instruction, the casualty risk shall not exceed 1 in 10,000 for any re-entry event (controlled or uncontrolled). If the predicted casualty risk for an uncontrolled re-entry exceeds this value, an uncontrolled re-entry is not allowed and a targeted controlled re-entry shall be performed in order not to exceed a risk level of 1 in 10,000.

2014-0520

ECSS-U-AS-10C
10 February 2012

EUROPEAN COOPERATION
FOR SPACE STANDARDIZATION

Space sustainability

**Adoption Notice of ISO 24113:
Space systems - Space debris
mitigation requirements**

ECSS Secretariat
ESA-ESTEC
Requirements & Standards Division
Noordwijk, The Netherlands

Dit document mag slechts op een interne PC worden gebruikt. De link op een netwerk is alleen bedoeld voor de interne PC's van de organisatie. Het gebruik van andere PC's, het gebruik van andere netwerken of het kopiëren van dit document is niet toegestaan. Het gebruik van andere PC's, het gebruik van andere netwerken of het kopiëren van dit document is niet toegestaan. Het gebruik van andere PC's, het gebruik van andere netwerken of het kopiëren van dit document is niet toegestaan.

INTERNATIONAL STANDARD **ISO 24113**

Second edition
2011-05-15

Space systems — Space debris mitigation requirements

Systèmes spatiaux — Exigences de mitigation des débris spatiaux



Reference number
ISO 24113:2011(E)

© ISO 2011


Dit document is door NEN onder licentie versprekt aan: / This document has been supplied under license by NEN to:
ESA ESTEC nenyjoer@esa.int 07/16/2013 3:28:34 PM

ESSB-HB-U-002

ESA Space Debris Mitigation Compliance Verification Guidelines




- ESSB-HB-U-002 – ESA Space Debris Mitigation Compliance Verification Guidelines has been issued in Feb-2015.
- ESSB-HB-U-002 is an handbook providing guidelines on the verification of the ESA Space Debris Mitigation requirements.
- ESSB-HB-U-002 was prepared by ESA Space Debris Mitigation Working Group.
- ESSB-HB-U-002 will be regularly updated based on the feedback from ESA and Industry users and the outcome of on-going studies (e.g. in the frame of the Clean Space Initiative).

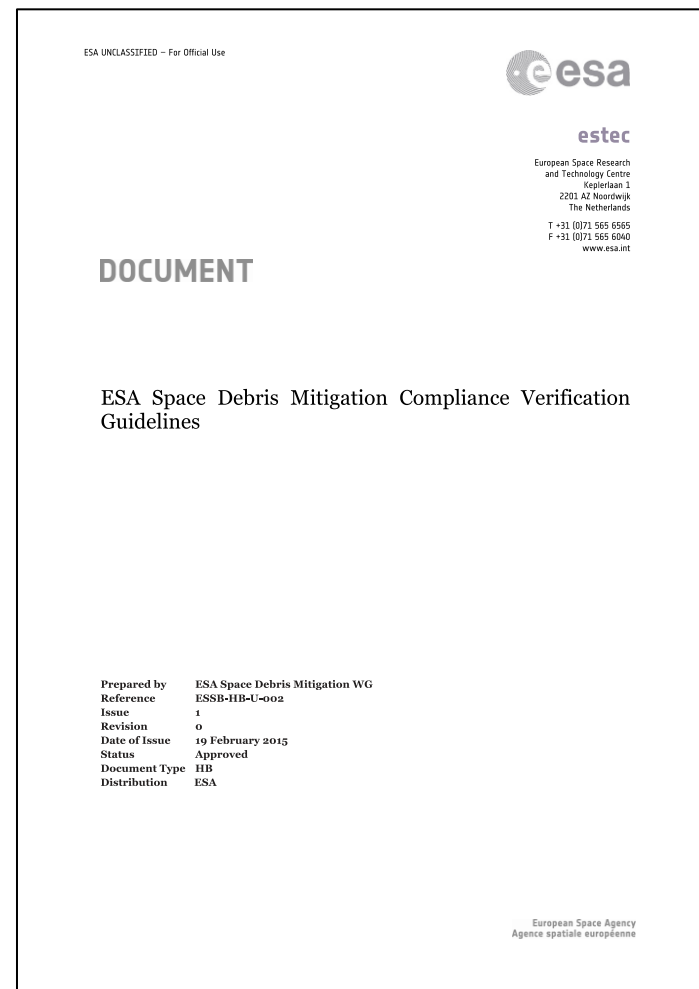

1. LEO Protected Region

Low Earth Orbit Protected Region is a shell that extends from the surface of a spherical Earth with an equatorial radius of 6,378 km up to an altitude (Z) of 2000 km



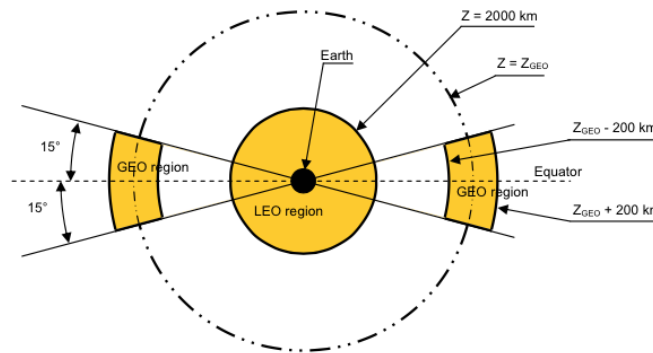


2. GEO Protected Region



Geosynchronous Protected Region is a segment of a spherical shell defined by:

- lower altitude boundary = geostationary altitude minus 200 km
- upper altitude boundary = geostationary altitude plus 200 km
- latitude sector: $15 \text{ deg South} \leq \text{latitude} \leq 15 \text{ deg North}$
- geostationary altitude (Z_{GEO}) = 35,786 km (with respect to the spherical Earth with an equatorial radius of 6,378 km)

Space Debris Population

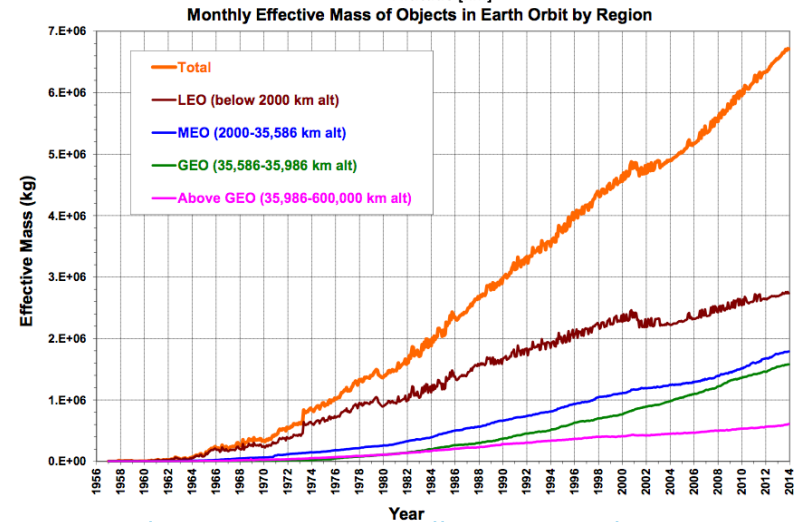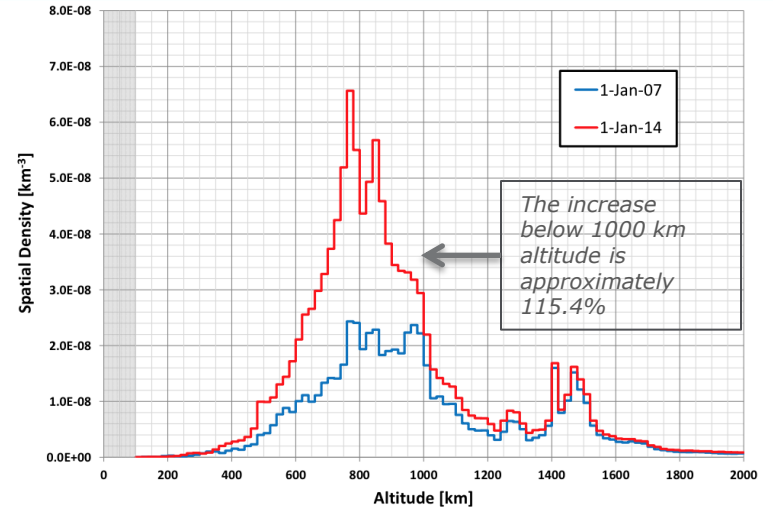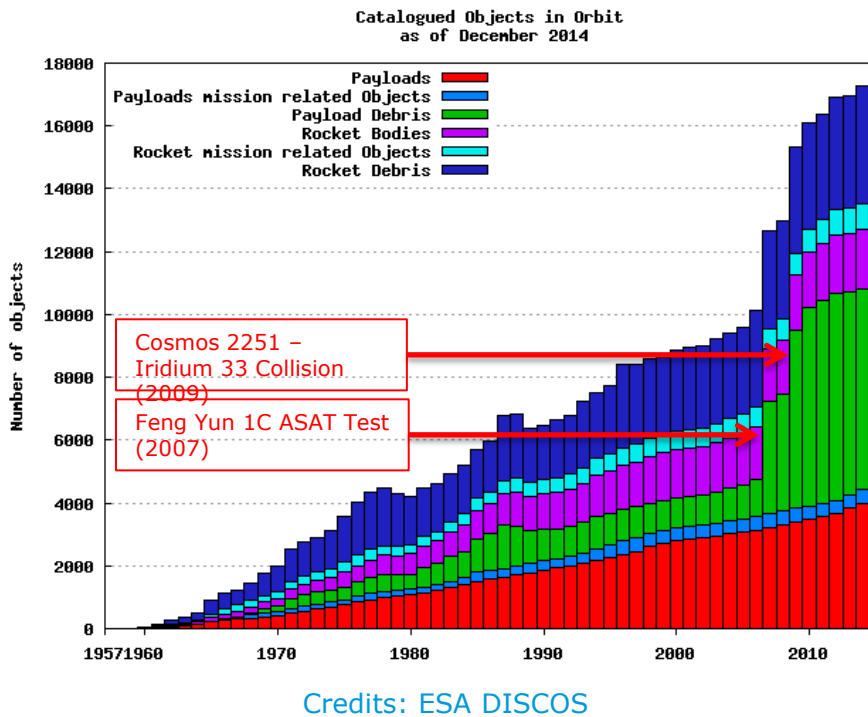

EOL De-orbit Strategies

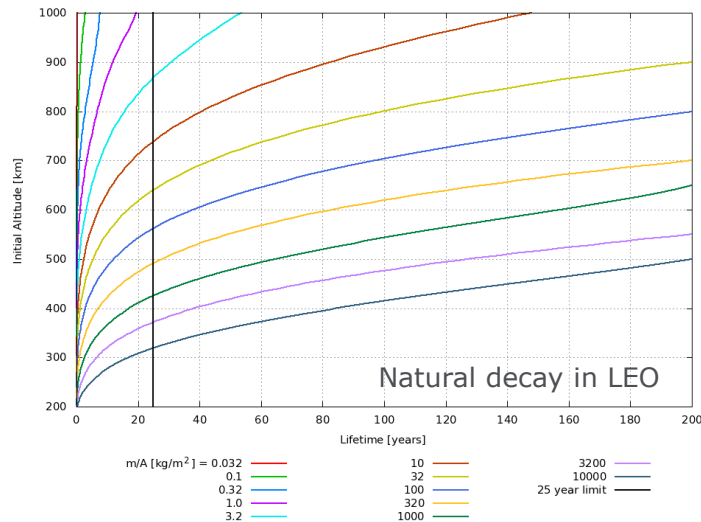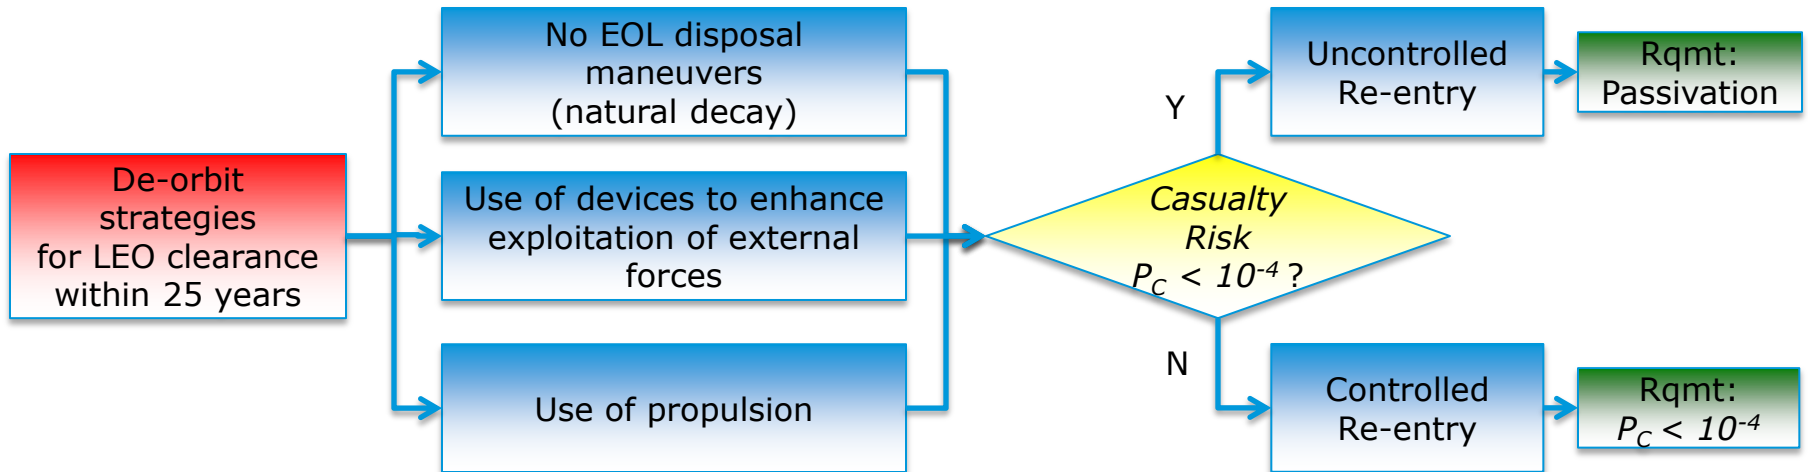

Requirement 6.3.3.1: LEO clearance



- **Presence in the LEO Protected Region limited to maximum of 25 years from the end of mission**

Requirement 6.3.3.2: LEO disposal maneuvers (possible options)

- **Retrieving** and performing a controlled re-entry to recover it safely on the Earth
- **Manoeuvring** in a controlled manner into a **targeted re-entry** with a well-defined impact footprint
- **Manoeuvring** in a controlled manner to an orbit with a **shorter orbital lifetime**
- Augmenting orbital decay by **deploying a device**
- Allowing its orbit to **decay naturally**
- Manoeuvring in a controlled manner to an orbit with a perigee altitude sufficiently above the LEO Protected Region for at least 100 years

LEO Clearance Rationale

- Presence in LEO limited to max 25 years to mitigate debris population growth over next 100 years as compromise between:
 - Reduction of debris generation risk due to in-orbit collisions and break-ups
 - Cost burden for implementation of de-orbit capability (e.g. propellant mass allocation)

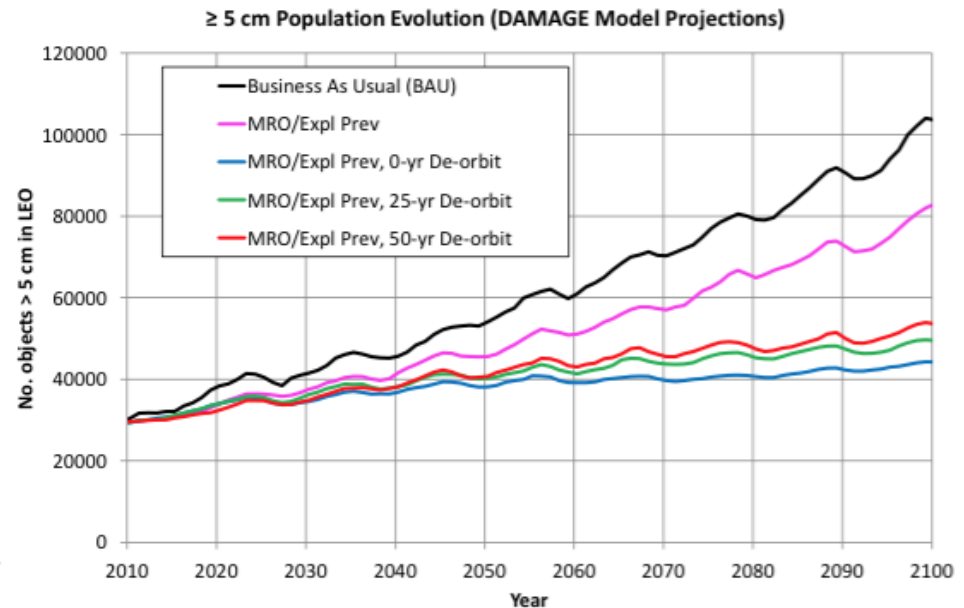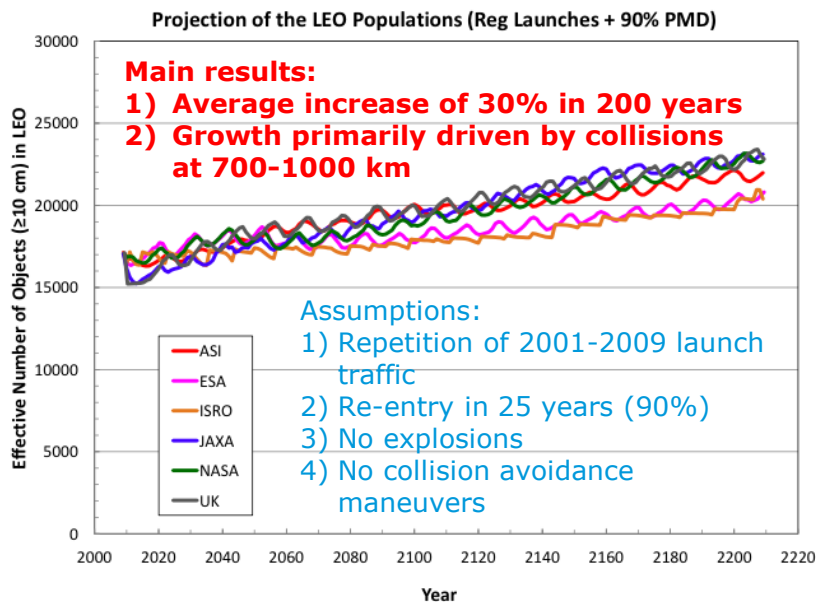

Credits: IADC, 2014

Requirement 6.3.1.1: disposal reliability threshold

- **Probability of successful disposal > 0.9 at the time disposal is executed**

Requirement 6.3.1.2: disposal reliability assessment

- Probability of successful disposal as conditional probability weighted on the mission success, i.e. $P(D|M)$

Requirement 6.3.1.3: disposal reliability constraints

- Start and end of the disposal phase chosen so that all disposal actions are completed within a period of time that ensures $P(D|M) > 0.9$

- The assessment of the EOL disposal reliability should include:
 - **EOL disposal reliability assessment during the development phase**
 - **EOL disposal reliability in-orbit assessment**

EOL Disposal Reliability Assessment during the Development Phase




$$P(D|M) = \frac{R_{Mission+Disposal}}{R_{Mission}} \geq 0.9$$

$P(D M)$	conditional probability to have successful disposal assumed the successful mission
$R_{Mission}$	mission reliability, i.e. the probability to perform successfully the mission
$R_{Mission+Disposal}$	mission and disposal reliability, i.e. the probability to accomplish successfully both the mission and the disposal

- $R_{Mission}$ and $R_{Mission+Disposal}$ need to take into account:
 - System reliability for disposal operations
 - Resources availability for disposal operations
 - Probability of internal explosion leading to structural break-up and preventing disposal operations
 - Probability of collision with other objects likely to cause break-up and preventing disposal operations
- $R_{Mission} = 1$ in case mission reliability is not defined or available

EOL Disposal Reliability In-orbit Assessment

- Reliability predictions cannot cover systematic or random hazardous faults prior to launch
- Monitoring equipment performance is needed for decision-making on advanced or extended termination of nominal mission
- The health of a space system can be monitored to identify unanticipated degradation
- Care should be taken on anomalies potentially affecting multiple equipment parts and lowering the effectiveness of redundancies

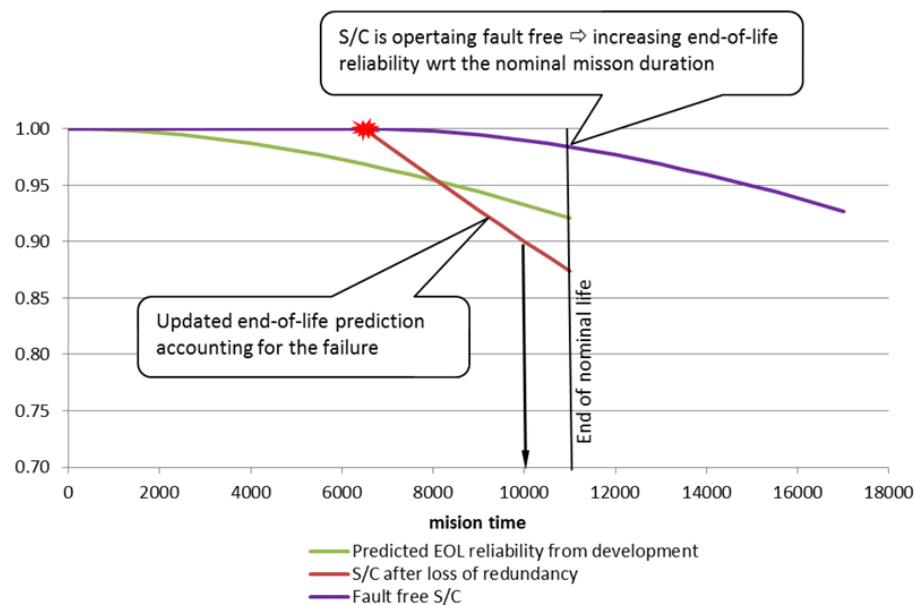

Requirement 6.1.1.2: mission-related objects on-orbit presence

- MROs outside the GEO Protected Region
- **MROs presence in the LEO Protected Region limited to a maximum of 25 years after release**

Requirement 6.1.2.1: pyrotechnic particle release

- **To avoid the release of products > 1 mm from pyrotechnic devices**

Requirement 6.1.2.3: solid rocket motors particle release in LEO

- **To avoid release of solid combustion products in the LEO Protected Region**

Requirement 6.2.2.1: break-up probability threshold

- Probability of accidental break-up < **10^{-3}** until its end of life

Requirement 6.2.2.3: passivation

- During the disposal phase, permanently **depletion or making safe all remaining on-board sources of stored energy** in a controlled sequence

Requirement 6.3.4.1: re-entry casualty risk acceptance



- **Maximum acceptable casualty risk set in accordance with norms issued by approving agents**

→ **ESA/ADMIN/IPOL(2014)2**


- a) *For ESA Space Systems for which the System Requirements Review has already been kicked off at the time of entry into force of this Instruction (28/03/2014), casualty risk minimisation shall be implemented on a best effort basis and documented in the Space Debris Mitigation Report.*
- b) *For ESA Space Systems for which the System Requirements Review has not yet been kicked off at the time of entry into force of this Instruction (28/03/2014), **the casualty risk shall not exceed 1 in 10000 for any re-entry event (controlled or uncontrolled)**. If the predicted casualty risk for an uncontrolled re-entry exceeds this value, an uncontrolled re-entry is not allowed and a targeted controlled re-entry shall be performed in order not to exceed a risk level of 1 in 10000.*

- The time of re-entry is not controlled
 - The re-entry epoch can be usually predicted with an uncertainty of about 20% of the time between the prediction and the expected re-entry event
- The ground zone of impact is not controlled
- Physical characteristics (mass, size, material) of on-ground surviving fragments are predictable
- The casualty risk for human population is estimable

GOCE
Uncontrolled Re-entry
(11/11/2013)

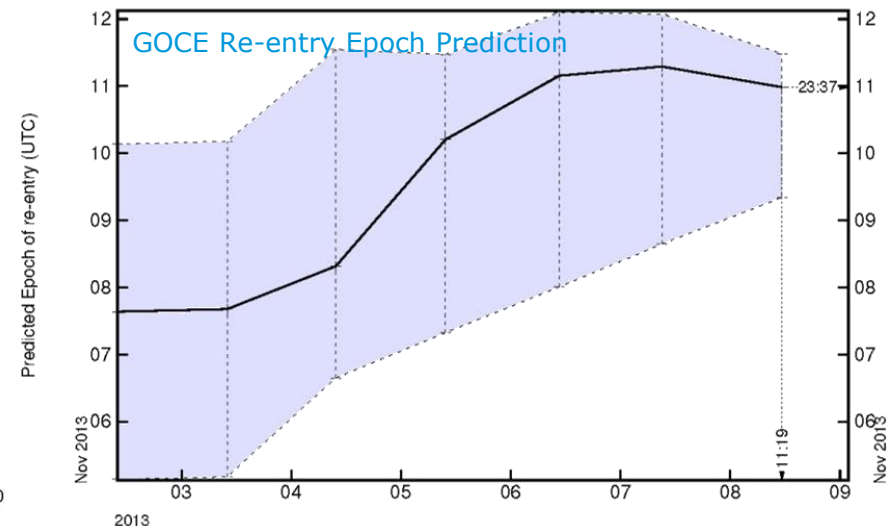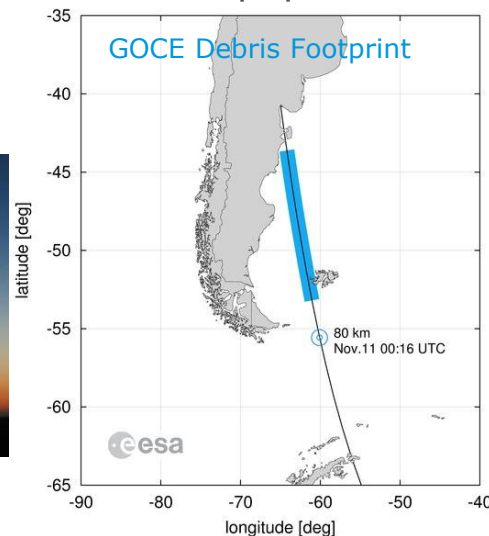


- The time of re-entry is controlled
- The ground zone of impact is controlled
- De-orbit maneuvers are executed to control the re-entry
- The Declared Re-entry Area (DRA) is determinable
- The Safety Re-entry Area (SRA) is determinable
- The main break-up event may be driven by targeting a specific perigee altitude for the last de-orbit maneuver
- The casualty risk for human population is estimable and can be widely minimized by targeting the debris impact over unpopulated areas

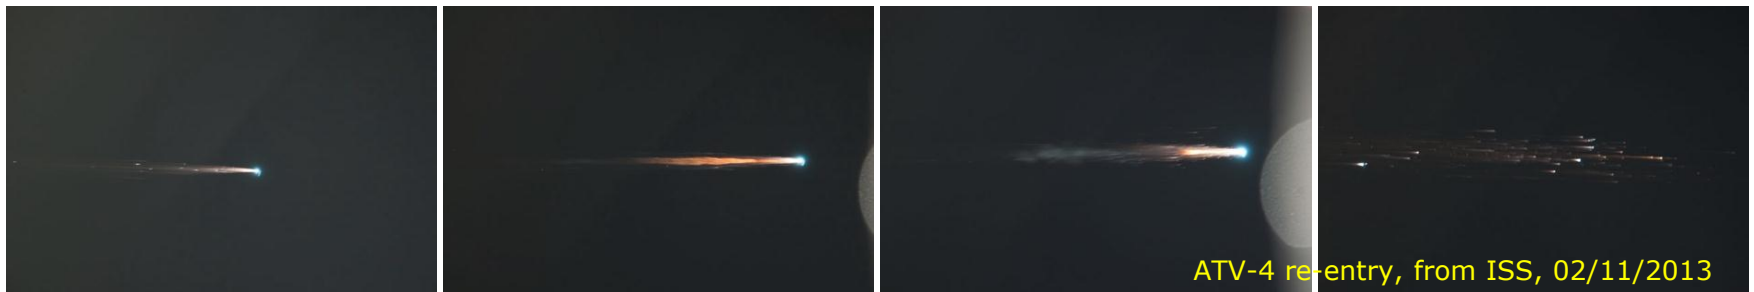

- Fragment casualty area

equivalent impact area leading a casualty if a person is struck by a piece of fragment (conventionally kinetic energy ≥ 15 J)

$$A_{C,k} = [\sqrt{A_{i,k}} + \sqrt{A_h}]^2$$



A_i average projected area of the fragment surviving the re-entry

A_h human cross-section, conventionally equal to 0.36 m² (NASA NSS 1740.14)


- Total casualty area

sum of N surviving fragments


$$A_C = \sum_{i=1}^N A_{C,k}$$




- Casualty risk for uncontrolled re-entry ($P_{C,unc}$):

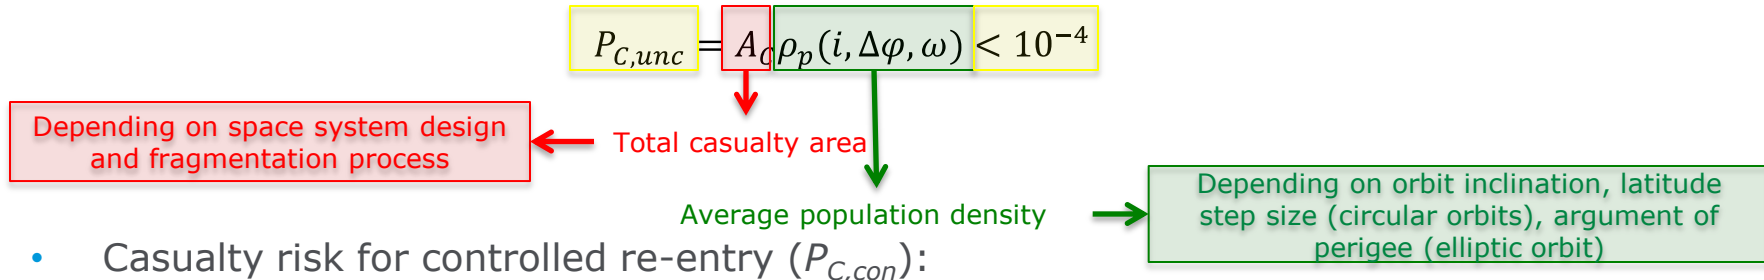

- Casualty risk for controlled re-entry ($P_{C,con}$):

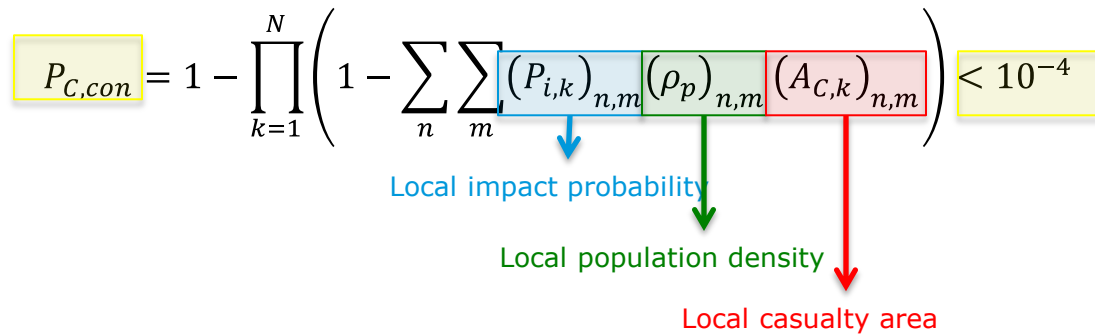

- Casualty risk for a failed controlled re-entry ($E_{C,con,fail}$):

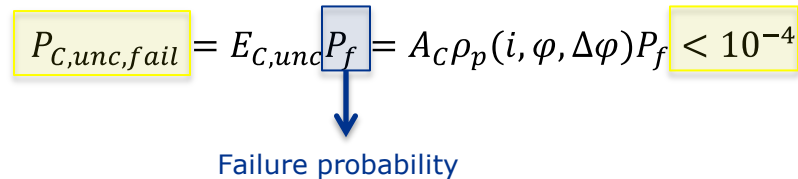

Declared Re-entry Area (DRA) and Safety Re-entry Area (SRA)

Declared Re-entry Area (DRA):


area on-ground where the re-entry debris are enclosed with a probability of 99% given the delivery accuracy

→ 10^{-2} footprint

Safety Re-entry Area (SRA):

area on-ground where the re-entry debris are enclosed with a probability of 99.999% given the delivery accuracy

→ 10^{-5} footprint

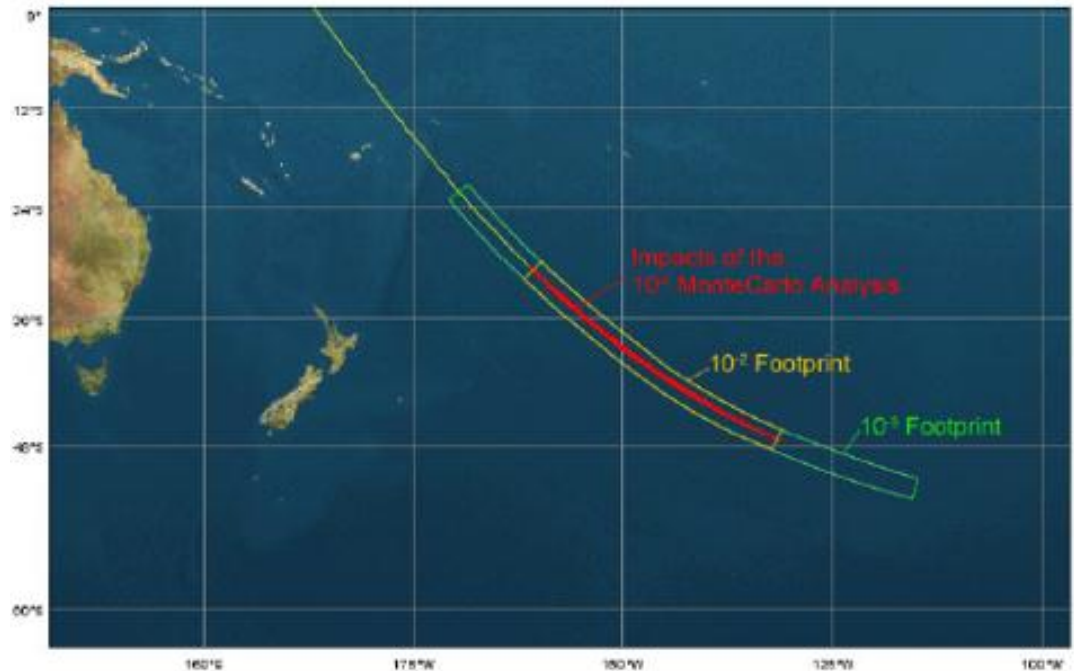


Criteria for Target Impact Area Selection for Controlled Re-entries

1. The impact area should be ensured over an ocean area, with sufficient clearance of landmasses and traffic routes
2. Territorial waters, i.e. 12 nm (22.2 km) from coastline, are considered to be part of national territories
3. The sovereign state should be informed in case of interference with its Economic Exclusive Zone (EEZ), i.e. 200 nm (370.4 km) from coastline
4. The South Pacific Ocean Uninhabited Area (SPOUA) has been identified as the largest unpopulated area to target the ATVs controlled re-entries (longitude range from 185 deg East to 275 deg East, latitude range from 29 deg South to 60 deg South)
5. Preserving zones classified as Marine Protected Areas for environment safeguard can be a constraint to take into account



ATV Controlled Re-entry

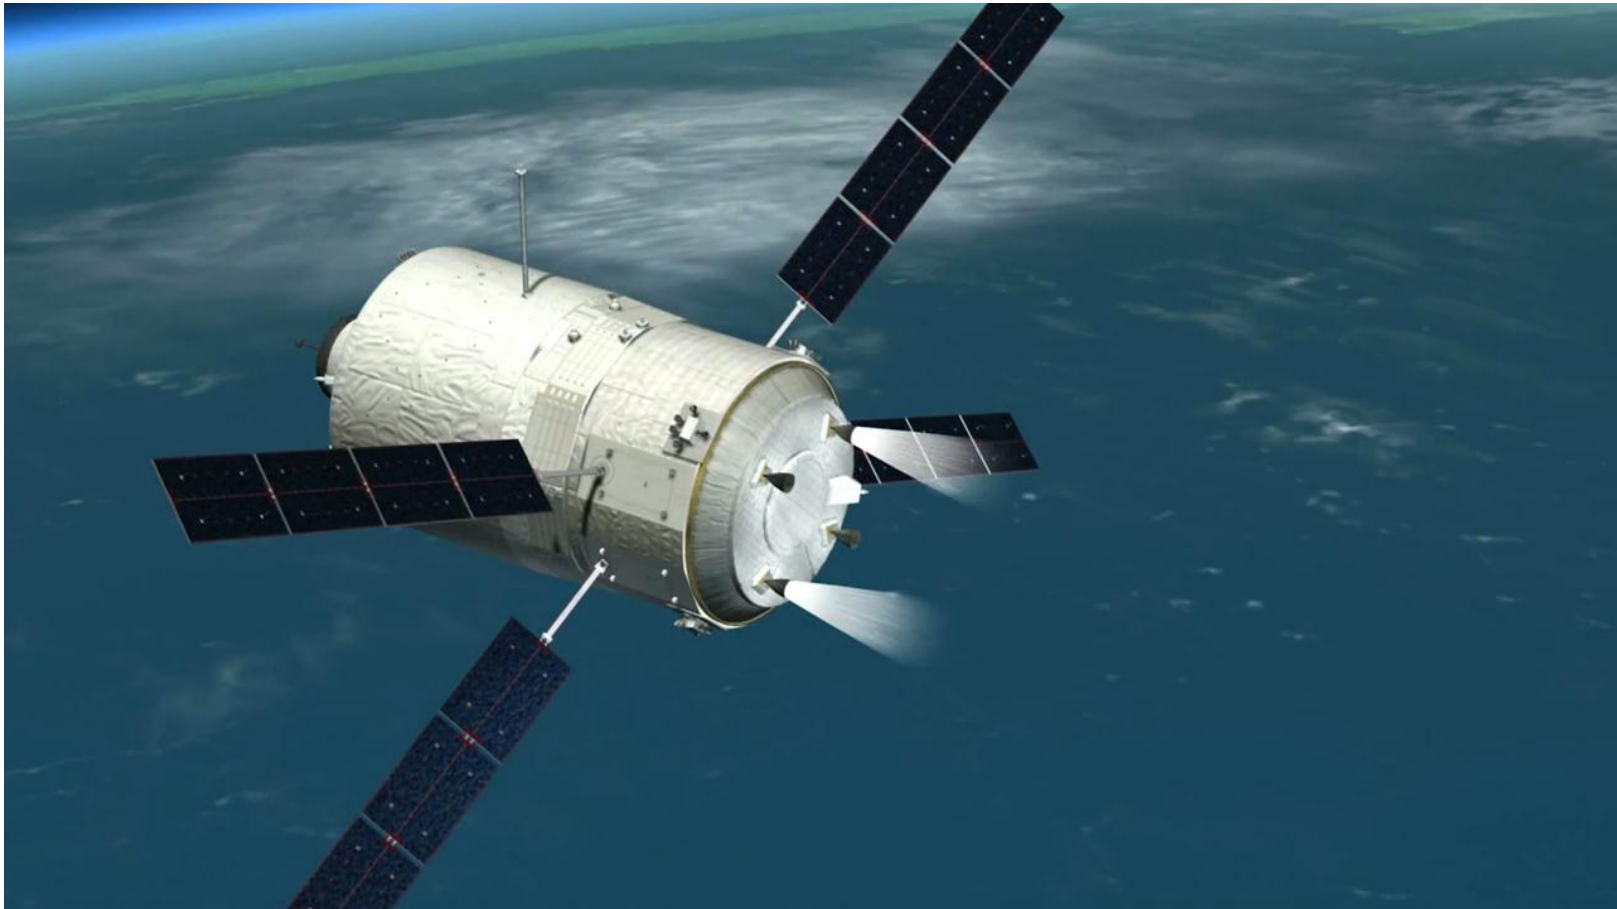

ATV controlled re-entry mission (Credits: ATV-CC / CNES)

ESA Requirements on EOL De-orbit | Technical Day on De-orbit Strategies | ESTEC | 17/03/2015 | TEC-QI | Slide 20

European Space Agency

ESA UNCLASSIFIED – For Official Use



Ref. TEC-QI/15-228

Re-entry Casualty Risk Tools

Name	Shape	No.of Obj.	Width/Diam. ...	Length [m]	Height [m]	Mass [kg]	Material
'Parent'	'Cylinder'	1	1.7	4.8	0.0	1200.0	'n/a'
'SolarP'	'Plate'	2	2.0	2.0	0.0	20.0	'n/a'
TCU	Box	1	0.52	0.38	0.27	33.0	'AA7075'
PCU	Box	1	0.23	0.18	0.16	5.0	'AA7075'
BCDR	Box	1	0.57	0.31	0.18	19.0	'AA7075'
BCU	Box	1	0.3	0.2	0.14	4.0	'AA7075'
PPDU	Box	1	0.41	0.32	0.17	13.0	'AA7075'
Batt	Box	1	0.54	0.4	0.21	50.0	'AA7075'
Decoder	Box	1	0.26	0.2	0.		
CTU	Box	1	0.4	0.25	0.		
RTU	Box	1	0.32	0.27	0.25	13.5	'AA7075'

Object-oriented tool

Inputs	DRAMA/SARA	ASTOS/DARS	DAS	SCARAB
Spacecraft Geometry	User-defined list of a parent and multiple child simple shapes (spheres, boxes, cylinders, plates)	User-defined list of multiple parents and child simple shapes (spheres, boxes, cylinders, plates)	User-defined list of multiple parents and child simple shapes (spheres, boxes, cylinders, plates)	Geometrical assembly of panels with user-defined shapes
Material Properties	Constant basic thermal properties	Constant basic thermal properties	Constant basic thermal properties	Temperature-dependent thermal and mechanical properties
Initial Conditions	Orbital state vector (3DOF)	Orbital state vector (3DOF)	Orbital state vector (3DOF)	Orbital state vector + Attitude (6DOF)
Fragmentation Approach	Object-oriented	Object-oriented	Object-oriented	Spacecraft-oriented
Fragmentation event(s)	Single solar array break-off and single break-up	Multiple break-up events	Multiple break-up events	Predictable events

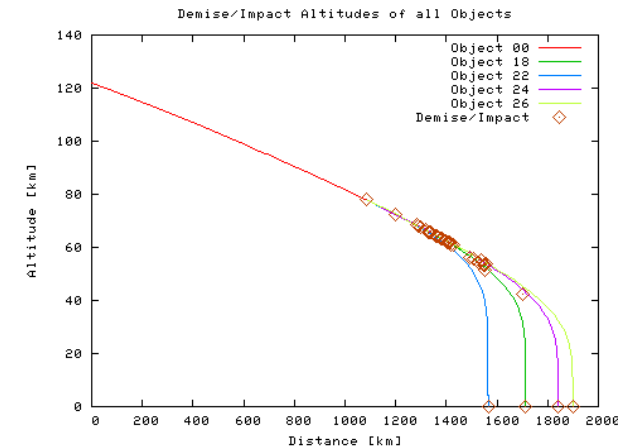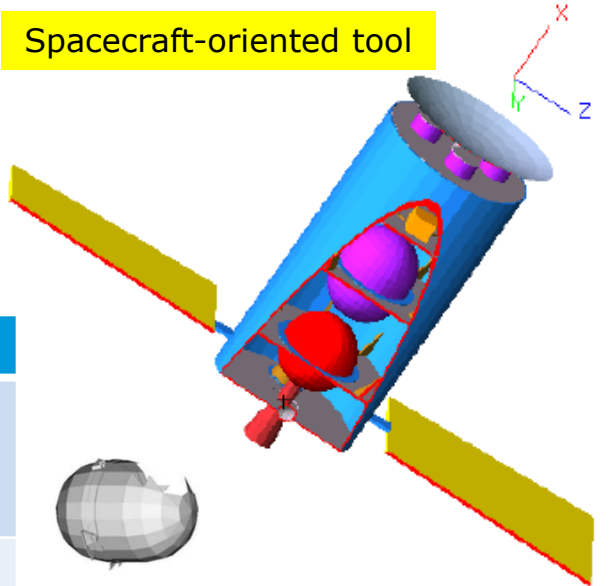

Questions?